


DATASHEET bizhub 266

Technology

Emperon™ – print controller	Easily compatible with different users and IT environments through Konica Minolta's unified print technology	×
Simitri® HD – polymerised toner	Delivers high print quality and yet ensures reduced print spending as well as lower environmental impact	 ✓
OpenAPI – solution platform	Server-based applications provide efficient workflows for the entire MFP fleet	×
i-Option – special feature	Offers extended scope and advanced MFP functionality in line with individual requirements	×
CSRC – remote service	Keeps productivity up with online monitoring of devices and consumables through the Konica Minolta service	 ✓
IWS – panel customisation	Improved user-device interaction and enhanced productivity through full MFP panel customisation	×

Option diagram

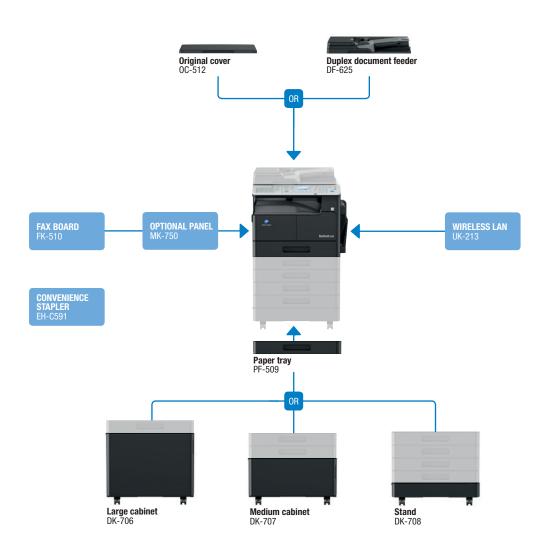

Finishing functionality



Descriptions

bizhub 266	Fully multifunctional A3 b/w device with 26 ppm; standard copy, PCL print and colour scanning functionality; paper capacity of 350 sheets (incl. multi-bypass tray); duplex printing; 512 MB standard memory; Fast Ethernet and USB 2.0 interface
DF-625 Document feeder	Automatic document feeding of up to 70 sheets
OC-512 Original cover	Cover (instead of ADF)
PF-509 Paper tray	B5–A3; 250 sheets; 64–90 g/m ² ; up to four can be equipped

DK TOO Daala (Jama)	50
DK-706 Desk (large)	For 0x or 1x PF-509
DK-707 Desk (medium)	For 2x PF-509
DK-708 Desk (small)	For 3x or 4x PF-509
FK-510 Fax kit	Super G3 fax
MK-750 Optional panel	Needed for fax function and scan one-touch destinations
UK-213 Wireless LAN	Wireless LAN interface
EH-C591 Convenience stapler	Convenient stapling of up to 50 sheets per set

Technical specifications

SYSTEM SPECIFICATIONS

System memory	512 MB
Interface	10/100-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11b/g/n (optional)
Network protocols	TCP/IP (IPv4/IPv6); SNMP; HTTP
Automatic document	Up to 70 originals; A5–A3; 35–128 g/m ² simplex;
feeder (optional)	50–128 g/m ² duplex; RADF
Printable paper size	A5–A3; customised paper sizes
Printable paper weight	64–157 g/m ²
Paper input capacity	350 sheets/1,350 sheets
(standard/max)	
Paper tray input	1x 250 sheets; A5–A3; custom sizes; 64–157 g/m ²
(standard)	
Paper tray input	4x 250 sheets; B5–A3; custom sizes; 64–90 g/m ²
(optional)	
Manual bypass	100 sheets; A5–A3; custom sizes; 64–157 g/m ²
Automatic duplexing	A5–A3; 64–90 g/m ²
Finishing modes	Group; sort; crisscross
Output capacity	Max. 250 sheets
Copy/print volume	Rec. 8,000 pages
(monthly)	Max. 12,000 pages ¹
Toner lifetime	Up to 12,000 pages
Power consumption	220–240 V / 50/60 Hz; Less than 1.3 kWh
System dimensions	627 x 570 x 458 mm (without options)
(W x D x H)	
System weight	Approx. 30.8 kg (without options)

PRINTER SPECIFICATIONS

Print resolution	600 x 600 dpi
	1,200 x 600 dpi
Page description	PCL 6/5e
language	
Operating systems	Windows Vista (32/64)
	Windows 7 (32/64)
	Windows 8 (32/64)
	Windows 10 (32/64)
	Windows Server 2008 (32/64)
	Windows Server 2008 R2
	Windows Server 2012
	Windows Server 2012 R2
	Linux; Citrix
Printer fonts	53 PCL Latin
Print functions	N-up; watermark; secure print; image rotation;
	booklet function
Mobile Printing	PageScope Mobile (iOS/Android/Windows 10 Mobile)
	Mobile Pairing (Android/iOS)

Scan speed Up to 46 ipm/ (mono/colour) Up to 26 ipm Scan resolution Up to 600 x 600 dpi Scan-to-eMail Scan modes Scan-to-SMB Scan-to-FTP Scan-to-USB Local TWAIN and WIA scan Network TWAIN scan File formats PDF; JPEG; TIFF 250 speed dial destinations; LDAP support; Scan destinations 32 one-touch destinations (optional)

SCANNER SPECIFICATIONS



COPIER SPECIFICATIONS

Copying process	Laser
Toner system	Simitri [®] HD polymerised toner
Copy/print speed A4	Up to 26 ppm
Copy/print speed A3	Up to 11 ppm
Autoduplex speed A4	Up to 21 ppm
1st copy out time A4	5.0 sec.
Warm-up time	Approx. 13 sec. ²
Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multi-copy	1–999
Original format	A5–A3; custom sizes
Magnification	25–400% in 0.1% steps; auto-zooming
Copy functions	2in1; 4in1; book copy; ID copy; shift margin; erase;
	image rotation; program registration

FAX SPECIFICATIONS

Fax standard	Super G3 (optional)
Fax transmission	Analogue; i-Fax
Fax resolution	Standard; Fine; Super-fine
	Up to: 408 x 392 dpi
	(Super-fine via optional ADF)
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	32 one-touch destinations; 250 speed dial destinations
Fax functions	PC-Fax; polling; forward; phone book; redial

SYSTEM FEATURES

Accounting	Up to 50 user accounts
Software	PageScope Web Connection
	PageScope NetCare Device Manager

- ¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed
- 2 Warm-up time may vary depending on the operating environment and usage

- All specifications refer to A4-size paper of 80 g/m² quality.
 The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables includ-
- ing page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
 Specifications and accessories are based on the information available at the time of printing and
- are subject to change without notice. Konica Minolta does not warrant that any specifications mentioned will be error-free. All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged. _



